
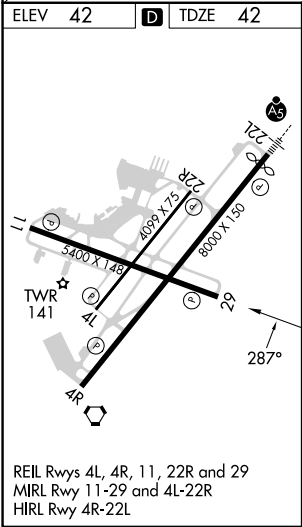


WAAS CH 45703 W29A	APP CRS 287°	Rwy ldg 5400 TDZE 42 Apt Elev 42
--	------------------------	---

RNAV (GPS) RWY 29
LAFAYETTE RGNL/PAUL FOURNET FLD (L.F'T')

RNP APCH.					MISSED APPROACH: Climb to 2800 direct SUVDE and on track 273° to RAYNE and hold.	
Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.						
ATIS 134.05	LAFAYETTE APP CON ★ 121.1 363.0	LAFAYETTE TOWER ★ 118.5 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 125.55	UNICOM 122.95	

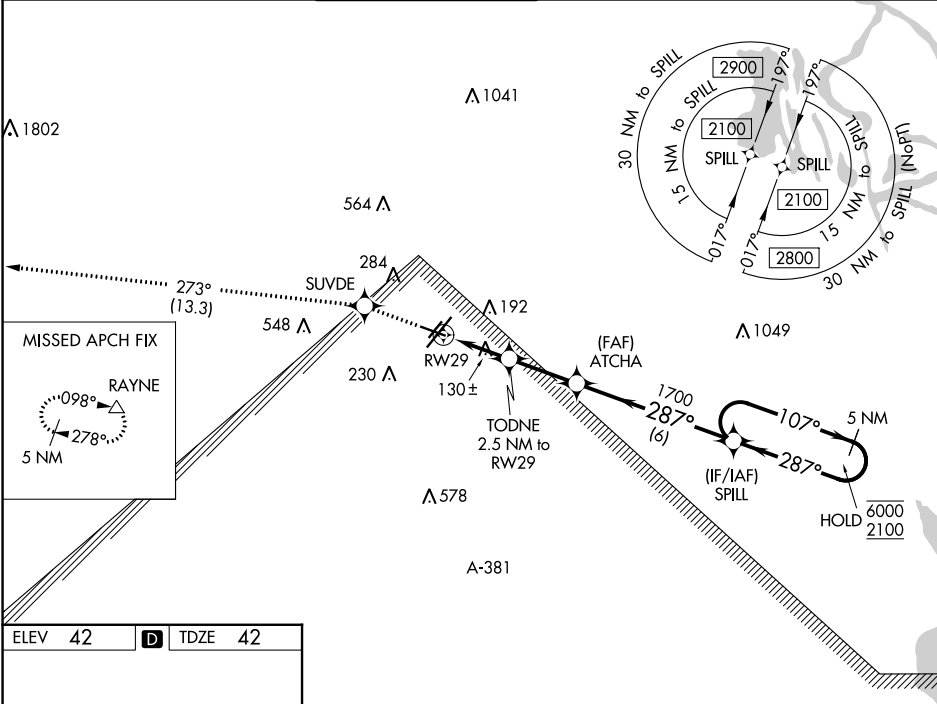

ELEV 42	D	TDZE 42
2800	SUVDE	fr 273°
RAYNE		
*LNAV only.		
TODNE 2.5 NM to RW29		
*0.9 NM to RW29		
*880		
1700		
1700		
287°		
107°		
5 NM Holding Pattern		
6000		
2100		
GP 3.00°		
TCH 51		
CATEGORY	A	B
LPV DA	292-¾	250 (300-¾)
LNAV/VNAV DA	292-¾	250 (300-¾)
LNAV MDA	380-1	338 (400-1)
CIRCLING	500-1 458 (500-1)	580-1 538 (600-1)
		700-1¾ 658 (700-1¾)
		700-2 658 (700-2)

SC-4, 21 MAR 2024 to 18 APR 2024

SC-4, 21 MAR 2024 to 18 APR 2024